





Evoke 6 Snack Merchandiser								
Selections	Up to 71 i	Up to 71 items (6 Tray); 83 Items (7 Tray)						
Electrical Require- ments	ı	Domestic: 115 VAC/60Hz, 1.2 AMPS International: 230 VAC/50Hz, 0.6 AMPS						
Dimensions	Height	Height 72" Width 46" Depth 35.2" (89.4 cm)						
Ship Weight	*626 lbs.	*626 lbs. (283.9 kg) *Varies with tray configuration and options.						
Standard Features	System, [FLEX Controller with 3.5" LCD Color Display, LED Lighting, iVend® Sensor System, Door Switch, Delivery Assist, Braille Keypad, Leg Covers, PayRange Mobile Payment System & ADA Compliant						
Options	Interface,	Custom Coil a	nd Tray C	creen Interface, configurations, C de LED Backlit I	Custom Co	0,		










Product Capacity and Flexibility

633 Items (6 Tray) (252 Snack-Pastry/381 Candy) 773 Items (7 Tray) (296 Snack-Pastry/477 Candy)









100 % Brighter LED Lighting



10.1" Touch Screen iCart Interface

Optional



ADA Compliant





Full-Size 7th Tray Optional



Evoke 5 Snack Merchandiser								
Selections	Up to 65 i	Up to 65 items						
Capacity	528 Items	528 Items (210 Snack & Pastry / 318 Candy)						
Electrical Requirements		Domestic: 115 VAC/60Hz, 1.2 AMPS International: 230 VAC/50Hz, 0.6 AMPS						
Dimensions	Height	72" (183 cm)	Width	41" (104 cm)	Depth	35.2" (89.4 cm)		
Ship Weight	*564 lbs.	*564 lbs. (256 kg) *Varies with tray configuration and options.						
Standard Features	System, D	FLEX Controller with 3.5" LCD Color Display, LED Lighting, iVend® Sensor System, Door Switch, Delivery Assist, Braille Keypad, Leg Covers, PayRange Mobile Payment System & ADA Compliant						
Options	Interface,	ch Screen Inter Custom Coil ar & Changeable I	nd Tray Co	onfigurations, (Custom C	•		









Shown with standard 3.5" Display, Braille Identified Keypad and Leg Covers

|--|

Shown with optional kick panel. Available with Platinum Silver door.

Mercato 5000 Snack Merchandiser								
Selections	Up to 65	Up to 65 items						
Payment Systems	All Indus	try standard	MDB co	mpatible device	es			
Data Communica- tion	DEX/UCS	DEX/UCS						
Electrical Requirements		Domestic: 115 VAC/60Hz, 1.2 AMPS International: 230 VAC/50Hz, 0.6 AMPS						
Dimensions	Height	72" (183 cm)	Width	41.1" (104.4 cm)	Depth	34.75" (88.3 cm)		
Shipping Weight	*516 lbs.	(234 kg) *l	aries wit	h configuration	& options	S.		
Standard Features		GVC2 Controller with Scrolling VF Display, LED Lighting, iVend® Delivery Sensor System, Motor Pairing Capable & Back Lighted Braille Keypad						
Options		or Pairing, A				EX Tool, ADA Delivery anel, Custom Colors &		











Shown with optional iCart/FLEX and kick panel options. Available with Black door.

pakedr Bakedr Bakedr Dorfor	
<u> </u>	
Parties	1, 2, 3, 4, 5, 6, 7, 8, 9, 1, 10, 14, 14, 14, 14, 14, 14, 14, 14, 14, 14

Shown with optional kick panel. Available with Platinum Silver door.

Mercato 4000								
Selections	Up to 52	items						
Standard Configuration	423 Item	423 Items (128 Snack / 255 Candy / 40 Pastry)						
Payment Systems	All Indus	All Industry standard MDB compatible devices						
Data Communication	DEX/UCS	DEX/UCS						
Electrical Requirements	Domestic: 115 VAC/60Hz, 1.2 AMPS International: 230 VAC/50Hz, 0.6 AMPS							
Dimensions	Height	Height 72" Width 35-5/32" Depth 34.75" (88.3 cm)						
Shipping Weight	*481 lbs	. (218.2 kg) *l	aries with	configuration & opt	tions.			
Standard Features	Dual Helix, GVC2 Controller with Scrolling VF Display, LED Lighting, iVend® Delivery							
Options	Motor Pa			FLEX controller, inl lint Tray, Kick Pane				









Mercato 3000								
Selections	Up to 36	items						
Standard Configuration	360 Item	360 Items (114/ Snack / 198 Candy / 48 Pastry)						
Payment Systems	All Indus	try standard N	1DB compa	tible devices				
Data Communication	DEX/UCS	DEX/UCS						
Electrical Requirements		Domestic: 115 VAC/60Hz, 1.2 AMPS International: 230 VAC/50Hz, 0.6 AMPS						
Dimensions	Height	Height 72" Width 29.3" Depth 34.75" (88.3 cm)						
Shipping Weight	*431 lbs	*431 lbs. (195.5 kg) *Varies with configuration & options.						
Standard Features	Sensor S	Dual Helix, GVC2 Controller with Scrolling VF Display, LED Lighting, iVend® Delivery Sensor System, Back Lighted Braille Keypad, Motor Pairing Capable and Gum & Mint Helixes						
Options		iring, Addition		FLEX controller, in flint Tray, Kick Pane	,	• '		











Evoke Elevator	Evo	ke	Ele	vator
----------------	-----	----	-----	-------

Shown with standard 3.5" Display, Braille Identified Keypad and Leg Covers

Evoke Elevator Refrigerated Merchandiser								
Selections	Up to 60 It	ems						
Capacity	Varies with	Tray Conf	iguration					
Payment Systems	All Industr	y standard	MDB Com	patible Devi	ces			
Data Communication	DEX/UCS							
Refrigeration	Super 1/3	HP, R134A	or R-513A	(SNAP Com	pliant)			
Electrical Requirements	Internation With Heat	Domestic: 115 VAC/60Hz, 5.5 AMPS International: 230 VAC/50Hz, 3 AMPS; With Heated Glass Option: 115 VAC/60Hz, 6.5 AMPS International: 230 VAC/50Hz, 3.5 AMPS						
Dimensions	Height	72" (183 cm)	Width	41" (104 cm)	Depth	38" (97 cm)		
Ship Weight	*831lbs. (3	376.9kg) *	Varies with	tray configu	uration an	d options.		
Standard Features	System, Li Covers, Eld	*831lbs. (376.9kg) *Varies with tray configuration and options. FLEX Controller with 3.5" LCD Color Display, LED Lighting, iVend® Sensor System, Lighted Delivery Bin, Door Switch, Versatile Steel Beverage Tray, Leg Covers, Elevator Delivery, Braille Keypad, Programmable by Individual Selections, Range & Row, PayRange Mobile Payment System & ADA Compliant						
Options	Interface,	Custom Co Automatic (il and Tray	Configuratio	ns, Custo	capacity Can Tray, Audio m Colors, Custom eable LED Backlit POS &		











Proven Elevator System Gently Delivers Products Packaged Meals, Salads, Sandwiches, Juices, Carbonated Beverages, Fresh Fruit, Dairy **Products Including Milk & Yogurt and More!**

20% Greater Capacity When compared with competitors

Healthy Safety Programmable by selections, range and row





First in First Out Loading Reduces Spoilage up to 30%





_								
Evoke 5 Refrigerated Merchandiser								
Selections	Up to 60	Items						
Capacity	Varies w	ith Tray Config	uration					
Payment Systems	All Indus	try standard N	IDB Comp	atible Devices				
Data Communication	DEX/UCS	DEX/UCS						
Refrigeration	Super 1	Super 1/3 HP, R134A or R-513A (SNAP Compliant)						
Electrical Requirements	Internat With He	Domestic: 115 VAC/60Hz, 5.5 AMPS International: 230 VAC/50Hz, 3 AMPS; With Heated Glass Option: 115 VAC/60Hz, 6.5 AMPS International: 230 VAC/50Hz, 3.5 AMPS						
Dimensions	Height	Height 72" Width 41" Depth 38" (97cm)						
Ship Weight	*811 lbs	. (367.8 kg) *l	Varies with	h tray configura	ation and o	options.		
Standard Features	System,	*811 lbs. (367.8 kg) *Varies with tray configuration and options. FLEX Controller with 3.5" LCD Color Display, LED Lighting, iVend® Sensor System, Door Switch, ADA Delivery Bin, Braille Keypad, Full Health Safety Feature, Leg Covers, PayRange Mobile Payment System & ADA Compliant						
Options	Audio In Custom	terface, Custor	n Coil and Panel, Au	Motor Pairing, Tray Configura tomatic Contro	ations, Cus	stom Colors,		











Evoke VT5

Shown with optional High Capacity Can Tray, optional 7" Touch Screen and standard Leg Covers

Evoke ST5

Shown with standard 3.5" Display, Braille Identified Keypad and Leg Covers



Evoke VT3

Shown with optional 7" Touch Screen and standard Leg Covers



Evoke ST3

Shown with standard 3.5" Display, Braille Identified Keypad and Leg Covers

Evoke 3 Refrigerated Merchandiser								
Selections		Up to 36 Items						
Capacity	Varies w	th Tray Configu	ıration					
Payment Systems	All Indus	try standard M	DB Compa	tible Devices				
Data Communication	DEX/UCS							
Refrigeration	Super 1	/3 HP, R134A	or R-513	BA (SNAP Co	mpliant)			
Electrical Requirements	Internat With He	Domestic: 115 VAC/60Hz, 5.5 AMPS International: 230 VAC/50Hz, 3 AMPS; With Heated Glass Option: 115 VAC/60Hz, 6.5 AMPS International: 230 VAC/50Hz, 3.5 AMPS						
Dimensions	Height	72" (183 cm)	Width	29.5" (75 cm)	Depth	38" (97 cm)		
Ship Weight	*691 lbs.	(313.4 kg) *V	aries with	tray configura	tion and o	ptions.		
Standard Features	System,	FLEX Controller with 3.5" LCD Color Display, LED Lighting, iVend® Sensor System, Door Switch, ADA Delivery Bin, Braille Keypad, Full Health Safety Feature, Leg Covers, PayRange Mobile Payment System & ADA Compliant						
Options	Audio Int Custom (7" iCart Touch Screen Interface, Motor Pairing, High Capacity Can Tray, Audio Interface, Custom Coil and Tray Configurations, Custom Colors, Custom Graphics, Kick Panel, Automatic Controller (Heated Glass) & Changeable LED Backlit POS						
		<u>\$</u>	ADA OMPLIANT	(€ ®		® LISTED		

















Evoke Outdoor							
Selections	Up to 60	Items					
Capacity	Varies w	vith tray confi	guration				
Payment Systems	All Indus	All Industry standard MDB Compatible Devices					
Data Communication	DEX/UCS	DEX/UCS					
Refrigeration	Super 1	Super 1/3 HP, R134A or R-513A (SNAP Compliant)					
Electrical Requirements	Internati With Hea	Domestic: 115 VAC/60Hz, 5.5 AMPS International: 230 VAC/50Hz, 3 AMPS; With Heated Glass Option: 115 VAC/60Hz, 6.5 AMPS International: 230 VAC/50Hz, 3.5 AMPS					
Dimensions	Height	72" (183 cm)	Width	45" (114 cm)	Depth	40" (102 cm)	
Ship Weight	*830 lbs	s. (376.5 kg)	*Varies w	ith tray config	guration a	and options.	
Standard Features		Outdoor Package, GVC2 Controller, Leg Covers, LED Lighting, iVend® Sensor System, and Door Switch, ADA Delivery Bin, ADA Compliant					
Options		, ,				tle, stom Graphics &	







Shown with standard 3.5" Display, Braille Identified Keypad and Leg Covers

Outdoor Package

Impact resistant Lexan window cover, rain guards and anti-pry covers provide superior resistance to the elements, vandals and thieves.





Shown with Platinum Silver door and Kick Panel option Available with Black door.

Alpine Combi 3000 Cold/Frozen						
Selections	Up to 36 Items					
Capacity	320 Items, Configurable up to 540					
Payment Systems	All Industry standard MDB Compatible Devices					
Data Communication	DEX/UCS					
Refrigeration	1/2 HP, R-404A or R-452A (SNAP Compliant)					
Electrical Requirements	Domestic: 115 VAC/60Hz, 13 AMPS International: 230 VAC/50Hz, 6.5 AMPS					
Dimensions	Height	72" (183 cm)	Width	29.5" (75 cm)	Depth	38" (97 cm)
Ship Weight	*680 lbs. (308.4 kg) *Varies with tray configuration and options.					
Standard Features	iVend® Delivery Sensor System, LED lighting, Heated Glass and High Efficiency Modular Refrigeration System					
Options	Delivery Assist Box, <i>InDEX</i> Tool, Motor Pairing, Dual Helix, Can & Bottle Tray, Custom Graphics & Kick Panel					









Available in Multi-Zone Configuration or Full Frozen Configuration

Vend refrigerated foods from the top zone at 36°F and frozen deserts at -15°F from the bottom.



Fresh Brew, Freeze Dried and Bean-to-Cup **Models Available**



Shown with Platinum Silver door and Kick Panel option Available with Black door.

Geneva Hot Beverage Merchandiser						
Selections	11 Major Selections & up to 34 Beverage Combinations of Coffee, Specialty Coffees, Hot chocolate, Tea, Cappuccino & Espresso					
Capacity	Up to 400 - 7 oz (210 ml) squat cups; Up to 384 - 12 oz (355 ml) cups Accommodates cups up to a lip diameter of 2.9-3.25" (73-82.5 mm)					
Payment Systems	All Indus	All Industry standard MDB Compatible Devices				
Data Communication	DEX/UCS	DEX/UCS, EVA-DTS compatible, USB copy/clone feature				
Electrical Requirements	Domestic: 115 VAC/60Hz., 9.5 AMPS; International: 230 VAC/50Hz 9 AMPS					
Dimensions	Height	72" (183 cm)	Width	27.5" (70.5 cm)	Depth	28" (71 cm)
Ship Weight	*361 lbs. (163.7 kg) *Varies with configuration and options.					
Standard Features	LED lighting, iVend® Delivery Sensor System, Advanced Power Management System, Automatic Delivery Door, Timed Free Vend, Discounting, One Touch Servicing					
Options	Fresh Brew and Freeze Dry Models, USB Programming Harness, Custom Colors, Custom Graphics and Kick Panel					











CTop Single Serve Coffee Pod Merchandier						
Selections	Up to 16 Selections					
Capacity	256 Item	256 Items (16 items per selection)				
Payment Systems	All Industry standard MDB Compatible Devices					
Data Communication	DEX/UCS	DEX/UCS				
Electrical Requirements	Domestic: 115 VAC/60Hz., 1.0 AMPS; International: 230 VAC/50Hz 0.5 AMPS					
Dimensions	Height	17.6" (44.7 cm)	Width	26.3" (66.8 cm)	Depth	23.8" (60.5 cm)
Ship Weight	151 lbs. (68.5 kg)					
Standard Features	LED Lighting, iVend® Delivery Sensor System and Braille Keypad					
Options	DEX Capability with Optional DEX Harness					













Summit 500 Cold Drink Vendor						
Selections	10 Selections					
Capacity	12 oz (355 ml) Can: 500 *20 oz (591ml) Bottle: 240 *24 oz (710 ml) Bottle: 240 * <i>Capacities vary depending on packaging.</i>					
Payment Systems	All Industry standard MDB Compatible Devices					
Data Communication	DEX/UCS					
Refrigeration	Super 1/3 HP, R-513a (SNAP Compliant)					
Electrical Requirements	Domestic: 115 VAC/60Hz., 5.5 AMPS; International: 230 VAC/50Hz 2.5 AMPS					
Dimensions	Height	72" (183 cm)	Width	31.75" (80.7 cm)	Depth	36.5" (92.7 cm)
Ship Weight	*671lbs (304.3 kg) *Varies with options.					
Standard Features	Delivery Drop Sensor, Live Product Display, Eye Catching Back Lighted Display					
Options	inDEX Tool (Pricing Only), Custom Colors, Custom Graphics, Extra 16.9oz filler, 250ml kit, 500 ml kit					







"In order to bring you the best products possible, we continue to improve product design and performance and as such specifications are subject to change without notice. The manufacturer makes no warranties or representations of compliance with any local, state, national or international requirements for the operation of the equipment in any application for which it is capable of being used beyond the UL and NAMA approvals listed on the product. Any purchaser is required to make an independent analysis of the fitness and legality of the product's usage before it is deployed and must continue to monitor the potential changing nature of compliance requirements. The manufacturer expressly disclaims responsibility for compliance with any laws and affirmatively requires any buyer to make an independent analysis of the fitness and legal basis of any use or application of the subject unit.

Standard Features & Options

U-Select-It's full line of vendors are packed full of features and available options to help you market more effectively.



Electronic Controllers and Operator Interface

- · Expanded sales and accounting features
- Back lighted keypad with Braille identification
- Bright LED display



UVend Technology (Optional) Quickly and safely sanitizes the machine's high-touch surfaces with UVC light



iVend® Ensured Delivery Sensing Technology Infrared sensor system virtually eliminates misvends and ensures that your customers receive their products or their money back.







Touch Screen Interfaces (Optional) Enhances consumer purchase experience. Available with Shopping Cart and Product Info Browse Mode. Communicates purchase information & messages



Motor Pairing Enables pairing two motors together for dispensing wide products.



Greenlite Cashless accepts credit, debit & mobile payments.

PUSH-IT Delivery System

PUSH-IT easily adapts to

many different products,

makes restocking simple,

and protects against

(Optional)


misloading.



Flex Shelf Technology

USI vendors feature the most versatile trays on the market with features that make a difference in your bottom line.





- Adjustable snack and candy selections
 - Full snack (5 3/4"W)
 - 3/4 snack (4 5/16"W)
- Candy (2 7/8"W)
- 360 degree helix adjustability in 20 - degree increments provides flexibility to vend virtually anything



Gum & Mint Tray (Optional)

Gum & Mint Tray option dispenses blister pack gum, rolled mints and even popular energy shots. Available on Mercato 4000, 5000 and Evoke 5.



Versatile Steel Beverage Tray Options Holds up to 60 canned or bottle beverages. 9 and 10 Select Trays Available.



ADA Delivery Bin (Optional) Standard on Evoke Product is delivered at 15" via lift mechanism. Operates with one hand.



High Capacity Can Tray (Optional)

Add up to 150 - 12 oz cans to your Evoke ST & VT vendors with this patented option.



Heated Glass

Optimum for use in high humidity locations. Standard on Alpine Combi 3000. Optional Evoke ST/VT5 and ST/VT3.



Custom Graphics (Optional)

Make your brand, product and marketing initiatives stand out with billboard graphics applied to your equipment.



High Security Kit

Impact resistant Lexan window cover, rain guards and anti-pry covers provide superior resistance to the elements, vandals and thieves. *Some features vary by model please consult manufacturer.



Kick Panel (Optional) Removable bottom panel

provides aesthetically pleasing continuous presentation.





USB Software Upgrades and DEX Downloads with **Evoke and Geneva**

Never miss a sale with Greenlite Cashless



Give your business the Greenlite to grow.



By accepting cashless payment options, including credit, debit and mobile payments, you can increase sales by 30% or more while increasing operational efficiencies.

Features:



Engineered for Mobile Payments



Integrated Cash Management



Timely Deposits, Clear Pricing, **Faster Profits**



Real-Time Reporting



Advanced Security



Inventory Management



Remote monitoring and pricing

Conlux MCM5 Series

Payment Systems – Conlux Coin Changes and Bill Validators

CONLUX

Other cash & credit payment systems including international are available. Please contact U-Select-It for quote.



Conlux CV 1000 Series

Coin Changers CONLUX.

> Model Type Currency/Capacity MCM5-1 MDB 5 Tube Cassette - 25¢, 5¢, 25¢, 10¢, 25¢ MDB 5 Tube Cassette - \$1, 5¢, 25¢, 10¢, 25¢ MCM5-5


Bill Validators CONLUX.

> Type Currency/Capacity Model

CV1012-U3M MDB U.S. 300 Bill Capacity - \$1-\$20 and Coupon - Bottler Front Bezel MDB U.S. 500 Bill Capacity - \$1-\$20 and Coupon - Full Line Front Bezel CV1012-U5M CV1012-U5M MDB U.S...... 500 Bill Capacity - \$1-\$20 and Coupon - Bottler

Competitive Financing Available

Innovative Finance Solutions Available For:

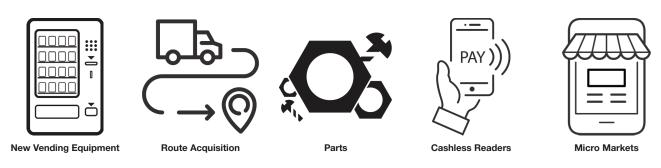

Leasing options also available

Since 1952, we have helped customers grow their vending businesses and reach their goals by providing flexible, competitive financing solutions.

Warranty and Service

Exceptional Quality Backed by Added Assurance

Premium 2-Year Warranty

Nothing drives us to do better than our commitment to your peace of mind. That's why every new USI merchandiser comes with a premium 2-year warranty*. True value is owning a quality merchandiser without repair worries.





If on-site support is required, our worldwide network of full-service distributors and service centers are available to assist you.