ALPINE ST5000 OUTDOOR
Single Temperature Glass Front Merchandiser

The Alpine ST5000 Outdoor glass front food & beverage merchandiser provides the largest dispensing capability with the highest energy efficiency in the industry. Vend sodas, juices, milk, yogurts, and other foods best served cold from one versatile package.

- **High security outdoor package**
- **Best in class energy efficiency**
- **Americans with Disabilities Act (ADA) Compliant**
- **Advanced styling & touch screen interface options**
- **Programmable health safety by selection, range or row**
- **Unmatched beverage options**
- **Motor pairing capable**
- **Single & dual coil options**
- **Energy efficient LED lighting**
- **Steel snack tray option**
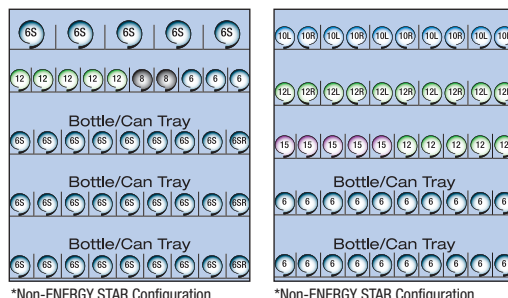- **New self cleaning condenser coil with reverse on startup fan**

Equipped with
Energy Efficient LED Lighting

ALPINE ST5000 OUTDOOR
Single Temperature Glass Front Merchandiser

Shown with optional kick panel.

Sample Configurations

| 6S | 6S | 6S | 6S | 6S |

| 12 | 12 | 12 | 12 | 12 | 8 | 6 | 6 | 6 |

Bottle/Can Tray

| 6S | 6S | 6S | 6S | 6S | 6S | 6S | 6S | 6S | 6SR |

Bottle/Can Tray

| 6S | 6S | 6S | 6S | 6S | 6S | 6S | 6S | 6S | 6SR |

Bottle/Can Tray

| 6S | 6S | 6S | 6S | 6S | 6S | 6S | 6S | 6S | 6SR |

Non-ENERGY STAR Configuration

| 10L | 10R | 10L | 10R | 10L | 10R | 10L | 10R | 10L | 10R |

| 12L | 12R | 12L | 12R | 12L | 12R | 12L | 12R | 12L | 12R |

| 15 | 15 | 15 | 15 | 15 | 12 | 12 | 12 | 12 | 12 |

Bottle/Can Tray

| 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 |

Bottle/Can Tray

| 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 |

Non-ENERGY STAR Configuration

Features

- **Rain guards, anti-pry covers and impact resistant Lexan® window cover**
- **Standard lighted keypad with Braille identification**
- **Americans with Disabilities Act Compliant**
- **MDB support for all industry standard devices including cash, coin, debit and credit systems**
- **DEX data output support**
- **Fully integrated controller with sales and accounting features:**
    - Price setting by selection, row or machine
    - Free vend and Combo vend modes
    - Flexible space to selection setting
    - Time of day discounting
    - Time of day shutdown modes for energy savings and controlled vend times
    - Programmable point of sale messages
    - Programmable coupon and token values
    - Coin and bill rejection rate counts
    - Accountability display by selection, row or machine
    - Talker device support for sight impaired
- **Motor pairing capable**
- **Proven Operating Environment**
    - *High: 100°F (38°C) @ 90% RH*
- **Reverse on startup condenser fan**
- **2 year warranty** - contact USI for complete details

Energy Efficient

- Uses only 4.2 Kwh/day @ 75°F (24°C), 45% RH based on refrigerating 34.6 cu.ft. of space
- Low-E Argon filled insulated glass
- LED lighting
- Thickest foaming on the market with Eco-friendly BASF Autofroth® foaming process
- Balanced airflow design
- Energy saving programmable shutdown modes
- Eco-friendly refrigeration system

High Security Package
Impact resistant Lexan window cover, rain guards and anti-pry covers provide superior resistance to the elements, vandals and thieves.

Adjustable Snack & Food Selections
Configurable to almost any package size in the field with no need for tools.
Full selection (5-3/4"W)
3/4 selection (4-5/16"W)
Single selection (2-7/8"W)

greenlite
powered by Cantaloupe Systems

Optional Cashless
Greenlite Cashless accepts credit, debit & mobile payments with valuable telemetry and machine management tools.

Patented High Capacity Can Tray
Features live product display and holds up to 150-12oz. cans.

Versatile Steel Beverage Trays
Hold up to 60 canned or bottle beverages and come in 10 select or 9 select versions for wider product

Alpine ST5000 Outdoor

Selections	Up to 60 items
Capacity	Varies with tray configuration
Selection Pricing	Individual from $0 to $9,999.95
Payment Systems	All Industry standard MDB compatible devices
Data Communication	DEX/UCS
Electrical Requirements	Domestic: 115 VAC/60Hz, 9.5 AMPS International: 230 VAC/50Hz, 4.8 AMPS; With : 115 VAC/60Hz, 10.5 AMPS International: 230 VAC/50Hz, 5.2 AMPS
Refrigeration	Super 1/3 HP, R134a or R-513a Closed System
Dimensions	Height 72"(183 cm) Width 41" (104 cm) Depth 38" (97 cm)
Shipping Weight	*830 lbs. (376.5 kg) *Varies with tray configuration
Standard Features	Outdoor Package, GVC2 Controller, LED Lighting, iVend® Sensor System, Delivery Assist Box, 9 Select Can & Bottle Trays, Door Switch
Options	6th Tray, Dual Helix, Delivery Assist Box, Motor Pairing, 10 Select Can/Bottle, High Capacity Can Tray, inDEX Tool, Heated Glass, Custom Graphics

In order to bring you the best products possible, we continue to improve product design and performance and as such specifications are subject to change without notice. The manufacturer makes no warranties or representations of compliance with any local, state, national or international requirements for the operation of the equipment in any application for which it is capable of being used beyond the UL and NAMA approvals listed on the product. Any purchaser is required to make an independent analysis of the fitness and legality of the product's usage before it is deployed and must continue to monitor the potential changing nature of compliance requirements. The manufacturer expressly disclaims responsibility for compliance with any laws and affirmatively requires any buyer to make an independent analysis of the fitness and legal basis of any use or application of the subject unit.