





Evoke 6 Snack Merchandiser							
Selections	Up to 71	tems (6 Tray);	83 Items	(7 Tray)			
Electrical Requirements	1	: 115 VAC/60H: nal: 230 VAC/5	,				
Dimensions	Height	Height 72" Width 46" Depth 35.2" (89.4 cm)					
Ship Weight	*626 lbs.	(283.9 kg) *Va	aries with	tray configurat	ion and op	otions.	
Standard Features	System, [FLEX Controller with 3.5" LCD Color Display, LED Lighting, iVend® Sensor System, Door Switch, Delivery Assist, Braille Keypad, Leg Covers, PayRange Mobile Payment System & ADA Compliant					
Options	Pairing, A	Audio Interface	, Custom	ogy, 10.1" Touc Coil and Tray C nel & Changeal	onfiguratio	,	









Product Capacity and Flexibility

633 Items (6 Tray) (252 Snack-Pastry/381 Candy) 773 Items (7 Tray) (296 Snack-Pastry/477 Candy)







Efficient LED

10.1" Touch Screen iCart Interface

Optional



ADA Compliant





Full-Size 7th Tray



Evoke 5 Snack Merchandiser						
Selections	Up to 65 i	tems				
Capacity	528 Items	(210 Snack &	Pastry / 3	318 Candy)		
Payment Systems	All Industi	ry standard MD	B compa	tible devices		
Data Communication	DEX/UCS					
Electrical Requirements		Domestic: 115 VAC/60Hz, 1.2 AMPS International: 230 VAC/50Hz, 0.6 AMPS				
Dimensions	Height	72" (183 cm)	Width	41" (104 cm)	Depth	35.2" (89.4 cm)
Ship Weight	*564 lbs.	(256 kg) *Vario	es with tr	ay configuratio	n and opt	tions.
Standard Features	FLEX Controller with 3.5" LCD Color Display, LED Lighting, iVend® Sensor System, Door Switch, Delivery Assist, Braille Keypad, Leg Covers, PayRange Mobile Payment System & ADA Compliant					
Options	Mint Tray,		e, Custor	n Coil and Tray	Configur	airing, Gum and ations, Custom & Kick Panel









Shown with standard 3.5" Display, Braille Identified Keypad and Leg Covers



Shown with optional kick panel. Available with Platinum Silver door.

Mercato 5000 Snack Merchandiser						
Selections	Up to 65	items				
Payment Systems	All Indus	try standard	MDB co	mpatible device	es	
Data Communication	DEX/UCS	i				
Electrical Requirements		o: 115 VAC/6 onal: 230 V	,			
Dimensions	Height	72" (183 cm)	Width	41.1" (104.4 cm)	Depth	34.75" (88.3 cm)
Shipping Weight	*516 lbs.	(234 kg) *l	aries wit	h configuration	& options	S.
Standard Features	Standard Features GVC2 Controller with Scrolling VF Display, LED Lighting, iVend® Delivery Sensor System, Motor Pairing Capable & Back Lighted Braille Keypad					· , ,
Options	Tool, ADA		n, Motor	Pairing, Additio		nd Technology, inDEX & Mint Tray, Kick Panel,











Shown with optional iCart/FLEX and kick panel options. Available with Black door.

Bakedi Bakedi poddo	
PHEP TO POSITION OF THE PARTY O	1. 2. 3. 4. 5. 6.
	7 8 9
Sar too	Ø ₽
	Ē.

Shown with optional kick panel. Available with Platinum Silver door.

Mercato 4000							
Selections	Up to 52	items					
Standard Configuration	423 Item	s (128 Snack	/ 255 Cand	y / 40 Pastry)			
Payment Systems	All Indus	try standard N	1DB compa	tible devices			
Data Communication	DEX/UCS	}					
Electrical Requirements	Domesti	Domestic: 115 VAC/60Hz, 1.2 AMPS International: 230 VAC/50Hz, 0.6 AMPS					
Dimensions	Height	72" (183 cm)	Width	35-5/32" (89 cm)	Depth	34.75" (88.3 cm)	
Shipping Weight	*481 lbs	. (218.2 kg) *l	aries with	configuration & opt	tions.		
Standard Features	Dual Helix, GVC2 Controller with Scrolling VF Display, LED Lighting, iVend® Delivery Sensor System, Back Lighted Braille Keypad, Motor Pairing Capable, and Gum & Mint Helixes						
Options	ADA Deli		or Pairing, A	FLEX controller, UV dditional Gum & M			









Mercato 3000							
Selections	Up to 36	items					
Standard Configuration	360 Item	s (114/ Snack	c / 198 Can	dy / 48 Pastry)			
Payment Systems	All Indus	try standard N	IDB compa	tible devices			
Data Communication	DEX/UCS	}					
Electrical Requirements		Domestic: 115 VAC/60Hz, 1.2 AMPS International: 230 VAC/50Hz, 0.6 AMPS					
Dimensions	Height	72" (183 cm)	Width	29.3" (74.4 cm)	Depth	34.75" (88.3 cm)	
Shipping Weight	*431 lbs	. (195.5 kg) *l	aries with	configuration & op	tions.		
Standard Features	Sensor S	Dual Helix, GVC2 Controller with Scrolling VF Display, LED Lighting, iVend® Delivery Sensor System, Back Lighted Braille Keypad, Motor Pairing Capable and Gum & Mint Helixes					
Options	ADA Deli		or Pairing, A	FLEX controller, in additional Gum & N	,	0,77	











Evoke Elevator

Shown with standard 3.5" Display, Braille Identified Keypad and Leg Covers

Evoke Elevator Refrigerated Merchandiser							
Selections	Up to 60 It	ems					
Capacity	Varies with	Tray Conf	iguration				
Payment Systems	All Industr	y standard	MDB Com	patible Devi	ces		
Data Communication	DEX/UCS						
Refrigeration	Super 1/3	HP, R134A					
Electrical Requirements	Internation With Heate	Domestic: 115 VAC/60Hz, 5.5 AMPS International: 230 VAC/50Hz, 3 AMPS; With Heated Glass Option: 115 VAC/60Hz, 6.5 AMPS International: 230 VAC/50Hz, 3.5 AMPS					
Dimensions	Height	72" (183 cm)	Width	41" (104 cm)	Depth	38" (97 cm)	
Ship Weight	*831lbs. (3	376.9kg) *	Varies with	tray configu	uration an	nd options.	
Standard Features	System, Li Covers, Ele	FLEX Controller with 3.5" LCD Color Display, LED Lighting, iVend® Sensor System, Lighted Delivery Bin, Door Switch, Versatile Steel Beverage Tray, Leg Covers, Elevator Delivery, Braille Keypad, Programmable by Individual Selections, Range & Row, PayRange Mobile Payment System & ADA Compliant					
Options	ity Can Tra Colors, Cu	y, Audio Int stom Graph	terface, Cu nics, Auton	stom Coil ar natic Control	nd Tray Co ler (Heate	Notor Pairing, High Capac- onfigurations, Custom ed Glass), Changeable LED & Kick Panel	













Proven Elevator System Gently Delivers Products Packaged Meals, Salads, Sandwiches, Juices, Carbonated Beverages, Fresh Fruit, Dairy **Products Including Milk & Yogurt and More!**

20% Greater Capacity When compared with competitors

Health Safety Programmable by selections, range and row





First in First Out Loading Reduces Spoilage up to 30%





Evoke 5 Refrigerated Merchandiser Selections Up to 60 Items Capacity Varies with Tray Configuration **Payment Systems** All Industry standard MDB Compatible Devices DEX/UCS **Data Communication** Refrigeration Super 1/3 HP, R134A Domestic: 115 VAC/60Hz, 5.5 AMPS International: 230 VAC/50Hz. 3 AMPS: **Electrical** With Heated Glass Option: 115 VAC/60Hz, 6.5 AMPS Requirements International: 230 VAC/50Hz, 3.5 AMPS 38" 72 Width **Dimensions** Depth (183cm) (104 cm) (97cm) Ship Weight *811 lbs. (367.8 kg) *Varies with tray configuration and options. FLEX Controller with 3.5" LCD Color Display, LED Lighting, iVend® Sensor **Standard Features** System, Door Switch, ADA Delivery Bin, Braille Keypad, Full Health Safety Feature, Leg Covers, PayRange Mobile Payment System & ADA Compliant 7" iCart Touch Screen Interface, UVend Technology, Motor Pairing, High Capacity Can Tray, Audio Interface, Custom Coil and Tray Configurations, Custom Colors, Custom Graphics, Kick Panel, Automatic Controller (Heated Glass), R-513A (SNAP Compliant) Refrigeration& Changeable LED









Evoke VT5

Shown with optional High Capacity Can Tray, optional 7" Touch Screen and standard Leg Covers

Evoke ST5

Braille Identified Keypad





Evoke VT3

Shown with optional 7" Touch Screen and standard Leg Covers



Evoke ST3

Shown with standard 3.5" Display, Braille Identified Keypad and Leg Covers

Evoke 3 Refrig	erated	Mercha	andise	er			
Selections	Up to 36	Up to 36 Items					
Capacity	Varies w	ith Tray Configu	ıration				
Payment Systems	All Indus	try standard M	DB Compa	tible Devices			
Data Communication	DEX/UCS						
Refrigeration	Super 1	/3 HP, R134A					
Electrical Requirements	Internat With He	Domestic: 115 VAC/60Hz, 5.5 AMPS International: 230 VAC/50Hz, 3 AMPS; With Heated Glass Option: 115 VAC/60Hz, 6.5 AMPS International: 230 VAC/50Hz, 3.5 AMPS					
Dimensions	Height	72" (183 cm)	Width	29.5" (75 cm)	Depth	38" (97 cm)	
Ship Weight	*691 lbs	. (313.4 kg) *V	aries with	tray configura	tion and o	ptions.	
Standard Features	System,	Door Switch, A	DA Deliver	y Bin, Braille k	(eypad, Fu	, iVend® Sensor II Health Safety ADA Compliant	
Options	High Cap tions, Cu	stom Colors, C Glass), R-513/	, Audio Int ustom Gra	erface, Custon phics, Kick Pa	n Coil and nel, Autom	chnology, Tray Configura- natic Controller on & Changeable	

















Evoke Outdoor F	Evoke Outdoor Refrigerated Merchandiser					
Selections	Up to 60) Items				
Capacity	Varies w	ith tray confi	guration			
Payment Systems	All Indus	stry standard	MDB Com	patible Devic	es	
Data Communication	DEX/UC	S				
Refrigeration	Super 1	/3 HP, R134A	or R-513	A (SNAP Cor	npliant)	
Electrical Requirements	Internati With He	ic: 115 VAC/6 ional: 230 VAC ated Glass Op ional: 230 VAC	C/50Hz, 3 otion: 115	AMPS; VAC/60Hz, 6.	5 AMPS	
Dimensions	Height	72" (183 cm)	Width	45" (114 cm)	Depth	40" (102 cm)
Ship Weight	*830 lbs	s. (376.5 kg)	*Varies w	ith tray config	guration a	and options.
Standard Features	Outdoor Package, GVC2 Controller, Leg Covers, LED Lighting, iVend® Sensor System, and Door Switch, ADA Delivery Bin, ADA Compliant					
Options	nology,		, High Cap	acity Can Tra	y, inDEX	ttle, UVend Tech- Tool, R-513A Kick Panel











Shown with standard 3.5" Display, Braille Identified Keypad and Leg Covers

Outdoor Package

Impact resistant Lexan window cover, rain guards and anti-pry covers provide superior resistance to the elements, vandals and thieves.





Shown with Platinum Silver door and Kick Panel option Available with Black door.

Alpine Combi 3000 Cold/Frozen							
Selections	Up to 36	Up to 36 Items					
Capacity	320 Item	s, Configurable	up to 540)			
Payment Systems	All Indus	try standard M	DB Compa	tible Devices			
Data Communication	DEX/UCS	;					
Refrigeration	½ HP, R-	404A					
Electrical Requirements		o: 115 VAC/60H onal: 230 VAC/5	,				
Dimensions	Height	72" (183 cm)	Width	29.5" (75 cm)	Depth	38" (97 cm)	
Ship Weight	*680 lbs	. (308.4 kg) *Va	aries with t	tray configurat	ion and op	otions.	
Standard Features		iVend® Delivery Sensor System, LED lighting, Heated Glass and High Efficiency Modular Refrigeration System					
Options	Helix, Ca	Assist Box, <i>InD</i> n & Bottle Tray ation & Kick Pa	, Custom C		037	· · · · · · · · · · · · · · · · · · ·	











Available in Multi-Zone Configuration or Full Frozen Configuration

Vend refrigerated foods from the top zone at 36°F and frozen deserts at -15°F from the bottom.



Fresh Brew and Freeze Dried Models Available



Evoke Coffee Ho	t Beve	rage Mer	chand	liser		
Selections		11 Major Selections & up to 34 Beverage Combinations of Coffee, Specialty Coffees, Hot chocolate, Tea, Cappuccino & Espresso				
Capacity	ı ·	0 - 7 oz (210 n odates cups up	, .			
Payment Systems	All Indus	try standard M	DB Compa	tible Devices		
Data Communication	DEX/UCS	, EVA-DTS com	npatible, U	SB copy/clone	feature	
Electrical Requirements	ı	:: 115 VAC/60l onal: 230 VAC/	,	,		
Dimensions	Height	72" (183 cm)	Width	27.5" (70.5 cm)	Depth	28" (71 cm)
Ship Weight	*361 lbs.	(163.7 kg) *Va	aries with	configuration a	and option	S.
Water Requirement	15-116 բ	osi (1-8 Bar)				
Standard Features	Manager	LED lighting, iVend® Delivery Sensor System, Advanced Power Management System, Automatic Delivery Door, Timed Free Vend, Discounting, One Touch Servicing				
Options		ew and Freeze ustom Graphic	-		-	rness, Custom el











CTop Single Serve Coffee Pod Merchandiser						
Selections	Up to 16	Selections				
Capacity	256 Item	s (16 items pe	r selection)		
Payment Systems	All Indus	try standard M	DB Compa	tible Devices		
Data Communication	DEX/UCS					
Electrical Requirements	1	Domestic: 115 VAC/60Hz., 1.0 AMPS; International: 230 VAC/50Hz 0.5 AMPS				
Dimensions	Height	17.6" (44.7 cm)	Width	26.3" (66.8 cm)	Depth	23.8" (60.5 cm)
Ship Weight	151 lbs.	151 lbs. (68.5 kg)				
Standard Features	LED Ligh	LED Lighting, iVend® Delivery Sensor System and Braille Keypad				
Options	DEX Cap	ability with Opt	ional DEX	Harness		





Evoke 500 Cold Drink Vendor								
Selections	10 Selections							
Capacity	12 oz (355 ml) Can: 500 *20 oz (591ml) Bottle: 240 *24 oz (710 ml) Bottle: 240 * <i>Capacities vary depending on packaging.</i>							
Payment Systems	All Industry standard MDB Compatible Devices							
Data Communication	DEX/UCS							
Refrigeration	Super 1/3 HP, R-513a (SNAP Compliant)							
Electrical Requirements	Domestic: 115 VAC/60Hz., 5.5 AMPS; International: 230 VAC/50Hz 2.5 AMPS							
Dimensions	Height	72" (183 cm)	Width	31.75" (80.7 cm)	Depth	36.5" (92.7 cm)		
Ship Weight	*671lbs (304.3 kg) *Varies with options.							
Standard Features	Delivery Drop Sensor, Live Product Display, Eye Catching Back Lighted Display							
Options	inDEX Tool (Pricing Only), UVend Technology, Custom Colors, Custom Graphics, Extra 16.9oz filler, 250ml kit, 500 ml kit							











Delivery Lockers



Delivery Lockers Powered by USI & 365 Retail Markets								
Compartments	Up to 18 Compartments/ Up to 20 in Satellite							
Compartment Sizes	Opening: (14/16) 10-23/32"H x 10-15/16"W, (4) 4-23/32"H x 10-15/16"W Depth: 22-15/16"D							
Payment Systems	All Industry standard MDB Compatible Devices							
Data Communication	DEX/UCS							
Electrical Requirements	Domestic: 115 VAC/60Hz, 1.2 AMPS International: 230 VAC/50Hz, 0.6 AMPS							
Dimensions	Height	73-5/16" (186.2 cm)	Width	30-1/8" (76.5 cm)	Depth	26-3/8" (62 cm)		
Ship Weight	*353 lbs. (160.1 kg) *Varies with options							
Standard Features	FLEX Controller with 3.5" LCD Color Display & LED Lighting							
Options	10.1" iCart Touch Screen Interface, UVend Technology & Custom Graphics Wrap							

Provide contactless food delivery and pick up stations with Delivery Lockers innovative food locker technology that provides an easy and secure option to pick up orders, at the customers preferred time.

- Reduces face-to-face interaction creating a contactless dining experience
- Secure and tamper proof, scan app or manually enter order code to retrieve orders
 - Create pick-up efficiencies reduces order mix-up/confusion
- Insulated cubbies keep hot/cold food viable for 30+ minutes

*In order to bring you the best products gossible, we continue to improve product design and performance and as such specifications are subject to change without notice. The manufacturer makes no warranties or representations of compliance with any local, state, national or international requirements for the operation of the equipment in any application for which it is capable of being used beyond the UL and MAMA approvals listed on the product. Any purchaser is required to make an independent analysis of the fiftness and legal basis of any use or application for the potential changing nature of compliance requirements. The manufacturer expressly disclaims responsibility for compliance with any laws and affirmatively requires any buyer to make an independent analysis of the fiftness and legal basis of any use or application for the subject unit.

Standard Features & Options

U-Select-It's full line of vendors are packed full of features and available options to help you market more effectively.



Electronic Controllers and Operator Interface

- Expanded sales and accounting features
- Back lighted keypad with Braille identification
- · Bright LED display



UVend Technology (Optional) Quickly and safely sanitizes the machine's high-touch surfaces with UVC light



iVend® Ensured Delivery Sensing Technology Infrared sensor system virtually eliminates misvends and ensures that your customers receive their products or their money back.







Touch Screen
Interfaces (Optional)
Enhances consumer
purchase experience.
Available with Shopping Cart
and Product Info Browse
Mode. Communicates
purchase information & messages



Motor Pairing
Enables pairing two
motors together for
dispensing wide products.





Cashless (Optional)
Greenlite Cashless accepts
credit, debit & mobile
payments.

PUSH-IT Delivery System

PUSH-IT easily adapts to

many different products,

makes restocking simple,

and protects against


(Optional)


misloading.



Flex Shelf TechnologyUSI vendors feature the most versatile trays on the market

with features that make a difference in your bottom line.





- Adjustable snack and candy selections
 - Full snack (5 3/4"W)
 - 3/4 snack (4 5/16"W)
- Candy (2 7/8"W)
- 360 degree helix adjustability in 20 - degree increments provides flexibility to vend virtually anything



Gum & Mint Tray (Optional)

Gum & Mint Tray option dispenses blister pack gum, rolled mints and even popular energy shots. Available on Mercato 4000, 5000 and Evoke 5.



Versatile Steel Beverage Tray Options Holds up to 60 canned or bottle beverages. 9 and 10 Select Trays Available.



ADA Delivery Bin (Optional) Standard on Evoke Product is delivered at 15" via lift mechanism. Operates with one hand.



High Capacity Can Tray (Optional)

Add up to 150 - 12 oz cans to your Evoke ST & VT vendors with this patented option.



Heated Glass
Optimum for use in high

humidity locations. Standard on Alpine Combi 3000. Optional Evoke ST/VT5 and ST/VT3.



Custom Graphics (Optional)

Make your brand, product and marketing initiatives stand out with billboard graphics applied to your equipment.



High Security Kit

Impact resistant Lexan window cover, rain guards and anti-pry covers provide superior resistance to the elements, vandals and thieves. *Some features vary by model please consult manufacturer.



Kick Panel (Optional)
Removable bottom panel
provides aesthetically

provides aesthetically pleasing continuous presentation.



USB Software Upgrades and DEX Downloads with Evoke and Geneva

Never miss a sale with Greenlite Cashless



Give your business the **Greenlite** to grow.



By accepting cashless payment options, including credit, debit and mobile payments, you can increase sales by 30% or more while increasing operational efficiencies.

Features:



Engineered for Mobile Payments



Integrated Cash Management



Timely Deposits, Clear Pricing, Faster Profits



Real-Time Reporting



Advanced Security



Inventory Management



Remote monitoring and pricing

Conlux MCM5 Series

Payment Systems - Conlux Coin Changes and Bill Validators

CONLUX.

Other cash & credit payment systems including international are available.

Please contact U-Select-It for quote.



Conlux CV 3000 Series

Coin Changers
CONLUX

 Model
 Type
 Currency/Capacity

 MCM5-1
 MDB
 5 Tube Cassette - 25¢, 5¢, 25¢, 10¢, 25¢


 MCM5-4
 MDB
 5 Tube Cassette - \$1, 5¢, 25¢, 10¢, 25¢

Bill Validators

Model Type Currency/Capacity

Competitive Financing Available

Innovative Finance Solutions Available For:

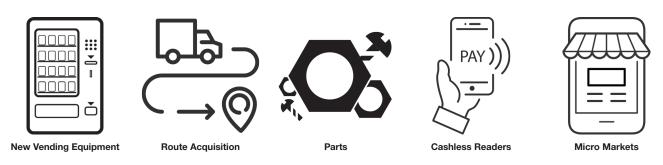

Leasing options also available

Since 1952, we have helped customers grow their vending businesses and reach their goals by providing flexible, competitive financing solutions.

Warranty and Service

Exceptional Quality Backed by Added Assurance

Premium 2-Year Warranty

Nothing drives us to do better than our commitment to your peace of mind. That's why every new USI merchandiser comes with a premium 2-year warranty*. True value is owning a quality merchandiser without repair worries.





If on-site support is required, our worldwide network of full-service distributors and service centers are available to assist you.