





Shown with optional 7th Tray, optional 10.1" Touch Screen and standard Leg Covers

Evoke 6 Snack	Evoke 6 Snack Merchandiser						
Selections	Up to 70	Up to 70 items (6 Tray); 82 Items (7 Tray)					
Electrical Requirements	ı	Domestic: 115 VAC/60Hz, 1.2 AMPS International: 230 VAC/50Hz, 0.6 AMPS					
Dimensions	Height	Height 72" Width 46" Depth 35.2" (89.4 cm)					
Ship Weight	*626 lbs.	(283.9 kg) *Va	aries with	tray configurat	tion and op	otions.	
Standard Features	System, [FLEX Controller with 3.5" LCD Color Display, LED Lighting, iVend® Sensor System, Door Switch, Delivery Assist, Braille Keypad, Leg Covers, PayRange Mobile Payment System & ADA Compliant					
Options	Pairing, A	Audio Interface	, Custom	ogy, 10.1" Touc Coil and Tray C anel & Changeal	onfiguratio	,	









Product Capacity and Flexibility

633 Items (6 Tray) (252 Snack-Pastry/381 Candy) 773 Items (7 Tray) (296 Snack-Pastry/477 Candy)







10.1" Touch Screen iCart Interface

Optional











Full-Size 7th Tray
Optional



Shown with standard 3.5" display, braille Identified keypad and leg covers

Evoke 5 Snack I	Evoke 5 Snack Merchandiser					
Selections	Up to 65 i	tems				
Capacity	528 Items	(210 Snack &	Pastry /	318 Candy)		
Payment Systems	All Industr	y standard MD	B compa	tible devices		
Data Communication	DEX/UCS					
Electrical Requirements		: 115 VAC/60Hz nal: 230 VAC/5				
Dimensions	Height	72" (183 cm)	Width	41" (104 cm)	Depth	35.2" (89.4 cm)
Ship Weight	*564 lbs.	(256 kg) *Vario	es with tr	ay configuratio	n and opt	ions.
Standard Features	System, D	FLEX Controller with 3.5" LCD Color Display, LED Lighting, iVend® Sensor System, Door Switch, Delivery Assist, Braille Keypad, Leg Covers, PayRange Mobile Payment System & ADA Compliant				
Options	Mint Tray,		e, Custoi	n Coil and Tray	Configur	airing, Gum and ations, Custom & Kick Panel











Shown with optional kick panel. Available with platinum silver door.

Mercato 5000 Snack Merchandiser								
Selections	Up to 65	Up to 65 items						
Payment Systems	All Indus	try standard	MDB cor	mpatible device	es			
Data Communication	DEX/UCS	;						
Electrical Requirements	ı	c: 115 VAC/6 onal: 230 V	,					
Dimensions	Height	72" (183 cm)	Width	41.1" (104.4 cm)	Depth	34.75" (88.3 cm)		
Shipping Weight	*516 lbs	. (234 kg) *l	aries wit	h configuration	& option	S.		
Standard Features	ı			, , , , , ,		g, iVend® Delivery d Braille Keypad		
Options	Tool, ADA		n, Motor	Pairing, Additio		nd Technology, inDEX & Mint Tray, Kick Panel,		











Shown with optional 7" Touch Screen and kick panel options. Available with black door.

Mercato 4000 Sr	nack N	/lerchand	diser					
Selections	Up to 52	items						
Standard Configuration	423 Item	423 Items (128 Snack / 255 Candy / 40 Pastry)						
Payment Systems	All Indus	try standard N	1DB compa	tible devices				
Data Communication	DEX/UCS	;						
Electrical Requirements	Domestic: 115 VAC/60Hz, 1.2 AMPS International: 230 VAC/50Hz, 0.6 AMPS							
Dimensions	Height	72" (183 cm)	Width	35-5/32" (89 cm)	Depth	34.75" (88.3 cm)		
Shipping Weight	*481 lbs	. (218.2 kg) *l	aries with	configuration & opt	tions.			
Standard Features	Standard Features Dual Helix, GVC2 Controller with Scrolling VF Display, LED Lighting, iVend® Delivery Sensor System, Back Lighted Braille Keypad, Motor Pairing Capable, and Gum & Mint Helixes							
Options	ADA Deli		or Pairing, A	FLEX controller, UN dditional Gum & M		,		









stakeeft Bakeeft Bakeeft	
Pierr Parites	t 2 3 4 5 6
	7.8.9

Shown with optional kick panel. Available with platinum silver door.

Mercato 3000 Snack Merchandiser									
Selections	Up to 36	Up to 36 items							
Standard Configuration	360 Item	360 Items (114/ Snack / 198 Candy / 48 Pastry)							
Payment Systems	All Indus	try standard N	1DB compa	tible devices					
Data Communication	DEX/UCS	3							
Electrical Requirements	Domestic: 115 VAC/60Hz, 1.2 AMPS International: 230 VAC/50Hz, 0.6 AMPS								
Dimensions	Height	72" (183 cm)	Width	29.3" (74.4 cm)	Depth	34.75" (88.3 cm)			
Shipping Weight	*431 lbs	. (195.5 kg) *l	aries with	configuration & opt	tions.				
Standard Features	Features Dual Helix, GVC2 Controller with Scrolling VF Display, LED Lighting, iVend® Delivery Sensor System, Back Lighted Braille Keypad, Motor Pairing Capable and Gum & Mint Helixes								
Options	ADA Deli		or Pairing, A	FLEX controller, inl dditional Gum & M	,	0,,			











Evoke Elevator

Shown with standard 3.5" display and braille identified keypad.

Evoke Elevator Refrigerated Merchandiser							
Selections	Up to 60 It	Up to 60 Items					
Capacity	Varies with	n Tray Confi	guration				
Payment Systems	All Industr	y standard	MDB Com	patible Devi	ces		
Data Communication	DEX/UCS						
Refrigeration	Super 1/3	HP, R134A					
Electrical Requirements	Internation With Heate	Domestic: 115 VAC/60Hz, 5.5 AMPS International: 230 VAC/50Hz, 3 AMPS; With Heated Glass Option: 115 VAC/60Hz, 6.5 AMPS International: 230 VAC/50Hz, 3.5 AMPS					
Dimensions	Height	72" (183 cm)	Width	41" (104 cm)	Depth	38" (97 cm)	
Ship Weight	*831lbs. (3	376.9kg) *	Varies with	tray configu	ıration an	d options.	
Standard Features	System, Li Covers, Ele	FLEX Controller with 3.5" LCD Color Display, LED Lighting, iVend® Sensor System, Lighted Delivery Bin, Door Switch, Versatile Steel Beverage Tray, Leg Covers, Elevator Delivery, Braille Keypad, Programmable by Individual Selections, Range & Row, PayRange Mobile Payment System & ADA Compliant					
Options	Capacity C Custom Co	an Tray, Au olors, Custo	dio Interfa m Graphic	ce, Custom s, Automatic	Coil and T Controlle	lotor Pairing, High ray Configurations, er (Heated Glass), nt) Refrigeration & Kick	









Proven Elevator System Gently Delivers Products

Packaged Meals, Salads, Sandwiches, Juices, Carbonated Beverages, Fresh Fruit, Dairy Products Including Milk &

First in First Out Loading

Reduces Spoilage up to 30%

20% Greater Capacity

When compared with competitors

Health Safety

Programmable by selections, range and row











Evoke 5 Refrigerated Merchandiser							
Selections	Up to 60	Items					
Capacity	Varies w	ith Tray Config	uration				
Payment Systems	All Indus	try standard N	IDB Comp	atible Devices			
Data Communication	DEX/UCS	3					
Refrigeration	Super 1	/3 HP, R134/	A				
Electrical Requirements	Internat With He	Domestic: 115 VAC/60Hz, 5.5 AMPS International: 230 VAC/50Hz, 3 AMPS; With Heated Glass Option: 115 VAC/60Hz, 6.5 AMPS International: 230 VAC/50Hz, 3.5 AMPS					
Dimensions	Height	72" (183cm)	Width	41" (104 cm)	Depth	38" (97cm)	
Ship Weight	*811 lbs	. (367.8 kg) *1	Varies with	h tray configur	ation and o	options.	
Standard Features	System,	Door Switch, A	ADA Delive	ery Bin, Braille	Keypad, F	g, iVend® Sensor ull Health Safety & ADA Compliant	
Options	Capacity Custom	Can Tray, Aud Colors, Custom R-513A (SNAF	dio Interfac n Graphics	ce, Custom Co s, Kick Panel, A	il and Tray utomatic (or Pairing, High Configurations, Controller (Heated angeable LED	







NAMA LISTED

Evoke VT5

Shown with optional High Capacity Can Tray, optional 7" Touch Screen and standard leg covers.

Evoke ST5

Shown with standard 3.5" display, braille identified keypad and standard leg covers.





Evoke VT3

Shown with optional High Capacity Can Tray, optional 7" Touch Screen and standard leg covers



Evoke ST3

Shown with standard 3.5" display, braille identified keypad and leg covers.

Evoke 3 Refrigerated Merchandiser									
Selections	Up to 36	Up to 36 Items							
Capacity	Varies wi	th Tray Configu	uration						
Payment Systems	All Indust	try standard M	DB Compa	tible Devices					
Data Communication	DEX/UCS								
Refrigeration	Super 1	/3 HP, R134A							
Electrical Requirements	Internat With He	Domestic: 115 VAC/60Hz, 5.5 AMPS International: 230 VAC/50Hz, 3 AMPS; With Heated Glass Option: 115 VAC/60Hz, 6.5 AMPS International: 230 VAC/50Hz, 3.5 AMPS							
Dimensions	Height	72" (183 cm)	Width	29.5" (75 cm)	Depth	38" (97 cm)			
Ship Weight	*691 lbs.	(313.4 kg) *V	aries with	tray configura	tion and o	ptions.			
Standard Features	System,	FLEX Controller with 3.5" LCD Color Display, LED Lighting, iVend® Sensor System, Door Switch, ADA Delivery Bin, Braille Keypad, Full Health Safety Feature, Leg Covers, PayRange Mobile Payment System & ADA Compliant							
Options	High Cap Configura Controlle	acity Can Tray ations, Custom	, Audio Int Colors, Cu s), R-513A	Notor Pairing, U erface, Custon ustom Graphics (SNAP Compli	n Coil and s, Kick Pa	Tray nel, Automatic			















Evoke Outdoor F	Evoke Outdoor Refrigerated Merchandiser							
Selections		Up to 60 Items						
Capacity	Varies w	rith tray confi	guration					
Payment Systems	All Indus	stry standard	MDB Com	patible Devic	es			
Data Communication	DEX/UC	3						
Refrigeration	Super 1	/3 HP, R134A	or R-513/	A (SNAP Cor	npliant)			
Electrical Requirements	Internati With He	c: 115 VAC/6 onal: 230 VAC ated Glass Op onal: 230 VAC	C/50Hz, 3 otion: 115	AMPS; VAC/60Hz, 6.	5 AMPS			
Dimensions	Height	72" (183 cm)	Width	45" (114 cm)	Depth	40" (102 cm)		
Ship Weight	*830 lbs	. (376.5 kg)	*Varies w	ith tray config	uration a	and options.		
Standard Features	Outdoor Package, GVC2 Controller, Leg Covers, LED Lighting, iVend® Sensor System, and Door Switch, ADA Delivery Bin, ADA Compliant							
Options	Technol	, Dual Helix, N ogy, Heated G (SNAP Compl	lass, High	Capacity Ca	n Tray, <i>in</i>	DEX Tool,		







Shown with standard 3.5" display, braille identified keypad and leg covers.

Outdoor Package

Impact resistant Lexan window cover, rain guards and anti-pry covers provide superior resistance to the elements, vandals and thieves.





Shown with platinum silver door and kick panel option. Available with black door.

Alpine Combi 3000	Alpine Combi 3000 Refrigerated/Frozen Merchandiser						
Selections	Up to 36	Up to 36 Items					
Capacity	320 Item	ıs, Configurable	up to 540)			
Payment Systems	All Indus	try standard M	DB Compa	tible Devices			
Data Communication	DEX/UCS	3					
Refrigeration	½ HP, R-	404A					
Electrical Requirements		c: 115 VAC/60H onal: 230 VAC/5	,				
Dimensions	Height	72" (183 cm)	Width	29.5" (75 cm)	Depth	38" (97 cm)	
Ship Weight	*680 lbs	. (308.4 kg) *Va	aries with t	ray configurat	ion and op	otions.	
Standard Features	iVend® Delivery Sensor System, LED lighting, Heated Glass and High Efficiency Modular Refrigeration System						
Options	Helix, Ca	Assist Box, <i>InD</i> n & Bottle Tray ation & Kick Pa	, Custom C		0,7	٠,	









Available in Multi-Zone Configuration or Full Frozen Configuration

Vend refrigerated foods from the top zone at 36°F and frozen deserts at -15°F from the bottom.



Fresh Brew and Freeze Dried Models Available



Evoke Coffee Ho	Evoke Coffee Hot Beverage Merchandiser						
Selections	11 Major Selections & up to 34 Beverage Combinations of Coffee, Specialty Coffees, Hot chocolate, Tea, Cappuccino & Espresso						
Capacity		Up to 400 - 7 oz (210 ml) squat cups; Up to 384 - 12 oz (355 ml) cups Accommodates cups up to a lip diameter of 2.9-3.25" (73-82.5 mm)					
Payment Systems	All Indus	ry standard M	DB Compa	tible Devices			
Data Communication	DEX/UCS	, EVA-DTS com	npatible, U	SB copy/clone	feature		
Electrical Requirements	Domestic: 115 VAC/60Hz., 9.5 AMPS; International: 230 VAC/50Hz 9 AMPS						
Dimensions	Height	72" (183 cm)	Width	27.5" (70.5 cm)	Depth	28" (71 cm)	
Ship Weight	*361 lbs.	(163.7 kg) *Va	aries with d	configuration a	and option	S.	
Water Requirement	15-116 բ	osi (1-8 Bar)					
Standard Features	LED lighting, iVend® Delivery Sensor System, Advanced Power Management System, Automatic Delivery Door, Timed Free Vend, Discounting, One Touch Servicing						
Options	1	ew and Freeze ustom Graphic	,	,	U	rness, Custom el	







Evoke 500 Cold Drink Vendor						
Selections	10 Selections					
Capacity	12 oz (355 ml) Can: 500 *20 oz (591ml) Bottle: 240 *24 oz (710 ml) Bottle: 240 * <i>Capacities vary depending on packaging.</i>					
Payment Systems	All Industry standard MDB Compatible Devices					
Data Communication	DEX/UCS					
Refrigeration	Super 1/3 HP, R-513a (SNAP Compliant)					
Electrical Requirements	Domestic: 115 VAC/60Hz., 5.5 AMPS; International: 230 VAC/50Hz 2.5 AMPS					
Dimensions	Height	72" (183 cm)	Width	31.75" (80.7 cm)	Depth	36.5" (92.7 cm)
Ship Weight	*671lbs (304.3 kg) *Varies with options.					
Standard Features	Delivery Drop Sensor, Live Product Display, Eye Catching Back Lighted Display					
Options	inDEX Tool (Pricing Only), UVend Technology, Custom Colors, Custom Graphics, Extra 16.9oz filler, 250ml kit, 500 ml kit					












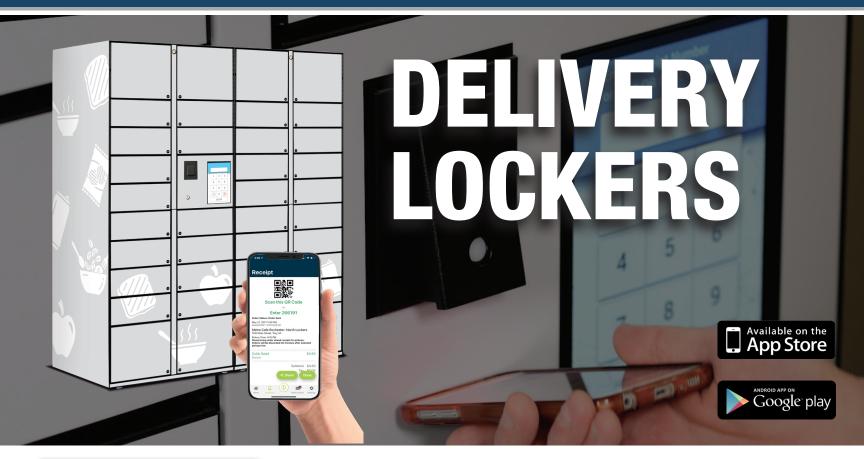



Provide contactless food delivery and pick up stations with Delivery Lockers — innovative food locker technology that provides an easy and secure option to pick up orders, at the customers preferred time.

- Reduces face-to-face interaction creating a contactless dining experience
- Secure and tamper proof, scan app or manually enter order code to retrieve orders
- Create pick-up efficiencies reduces order mix-up/confusion
- Insulated cubbies keep hot/cold food viable for 30+ minutes

Shown with Optional Graphics Wrap and Touch Screen





*In order to bring you the best products possible, we continue to improve product design and performance and as such specifications are subject to change without notice. The manufacturer makes no warranties or representations of compliance with any local, state, national or international requirements for the operation of the equipment in any application for which it is capable of being used beyond the UL and NAMA approvals listed on the product. Any purchaser is required to make an independent analysis of the fitness and legality of the product's usage before it is deployed and must continue to monitor the potential changing nature of compliance requirements. The manufacturer expressly disclaims responsibility for compliance with any laws and affirmatively requires any buyer to make an independent analysis of the fitness and legal basis of any use or application of the subject unit.

Standard Features & Options

U-Select-It's full line of vendors are packed full of features and available options to help you market more effectively.



Electronic Controllers and Operator Interface

- · Expanded sales and accounting features
- Back lighted keypad with Braille identification
- Bright LED display



UVend Technology (Optional) Quickly and safely sanitizes the machine's high-touch surfaces with UVC light



iVend® Ensured Delivery **Sensing Technology** Infrared sensor system virtually eliminates misvends and ensures that your customers receive their products or their money back.





Cashless (Optional) credit, debit & mobile



10.1" or 7" Touch Screen Interfaces (Optional) Enhances consumer purchase experience. Available with Shopping Cart and Product Info Browse Mode. Communicates purchase information & messages



Motor Pairing Enables pairing two motors together for dispensing wide products.

Gum & Mint Tray

Gum & Mint Tray option

dispenses blister pack

gum, rolled mints and even popular energy shots.

5000 and Evoke 5.

Available on Mercato 4000,

(Optional)



areenlite

Greenlite Cashless accepts payments.

PUSH-IT Delivery System

PUSH-IT easily adapts to

many different products,

and protects against

makes restocking simple,

(Optional)


misloading.



Flex Shelf Technology

USI vendors feature the most versatile trays on the market with features that make a difference in your bottom line.





- Adjustable snack and candy selections
 - Full snack (5 3/4"W)
 - 3/4 snack (4 5/16"W)
- Candy (2 7/8"W)
- 360 degree helix adjustability in 20 - degree increments provides flexibility to vend virtually anything



Versatile Steel Beverage Tray Options Holds up to 60 canned

or bottle beverages. 9 and 10 Select Trays Available.



ADA Delivery Bin (Optional) Standard on Evoke

Product is delivered at 15" via lift mechanism. Operates with one hand.





High Capacity Can Tray (Optional)

Add up to 150 - 12 oz cans to your Evoke ST & VT vendors with this patented option.



Heated Glass

Optimum for use in high humidity locations. Standard on Alpine Combi 3000. Optional Evoke ST/VT5 and ST/VT3.



High Security Kit

(Outdoor Only) Impact resistant Lexan window cover, provide superior resistance to the elements, vandals and thieves. *Some features vary by model please consult manufacturer.



Kick Panel (Optional)

Removable bottom panel provides aesthetically pleasing continuous presentation.



Custom Graphics (Optional)

Make your brand, product and marketing initiatives stand out with billboard graphics applied to your equipment.



USB Software Upgrades and DEX Downloads with **Evoke and Geneva**

Never miss a sale with Greenlite Cashless



Give your business the **Greenlite** to grow.



By accepting cashless payment options, including credit, debit and mobile payments, you can increase sales by 30% or more while increasing operational efficiencies.

Features:



Engineered for Mobile Payments



Integrated Cash Management



Timely Deposits. Clear Pricing, **Faster Profits**



Real-Time Reporting



Advanced Security



Remote Inventory Management



Remote monitoring and pricina

Conlux MCM5 Series

Payment Systems - Conlux Coin Changes and Bill Validators

CONLUX.

Other cash & credit payment systems including international are available. Please contact U-Select-It for quote.



Conlux CV 3000 Series

Coin Changers CONLUX

Type Currency/Capacity Model MCM5-1 MDB 5 Tube Cassette - 25¢, 5¢, 25¢, 10¢, 25¢ MCM5-4 MDB 5 Tube Cassette - \$1, 5¢, 25¢, 10¢, 25¢


Bill Validators CONLUX.

> Model Type Currency/Capacity

CV3Y2-U3MUS MDB U.S. 300 Bill Capacity - \$1-\$20 and Coupon - Bottler Front Bezel CV322-USMUS MDB U.S. 500 Bill Capacity - \$1-\$20 and Coupon - Full Line Front Bezel CV322-USMUS MDB U.S...... 500 Bill Capacity - \$1-\$20 and Coupon - Bottler

Competitive Financing Available

Innovative Finance Solutions Available For:

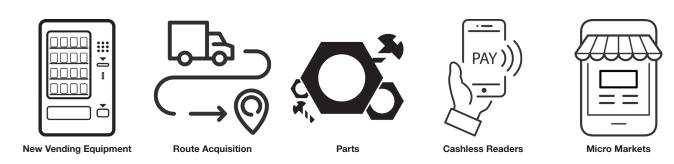

Leasing options also available

Since 1952, we have helped customers grow their vending businesses and reach their goals by providing flexible, competitive financing solutions.

Warranty and Service

Exceptional Quality Backed by Added Assurance

Premium 2-Year Warranty

Nothing drives us to do better than our commitment to your peace of mind. That's why every new USI merchandiser comes with a **premium 2-year warranty***. True value is owning a quality merchandiser without repair worries.





The Solid Shield Warranty provides up to an additional 36 months of warranty protection. Available with 12, 24 and 36 month coverage options, the Solid Shield Warranty provides peace of mind and coverage for future, unplanned expenses.